

## 2400i

## **Digital Inverter Generator**

Westinghouse digital inverter generators offer you the ultimate in portable power convenience. Lightweight, fuel efficient and quiet, their mains-quality electrical output can safely power all of your sensitive electronic equipment. They're an essential part of your gear for caravanning and camping and also great for home as a backup power supply.

### Features and Benefits

#### **Powerful**

High maximum power output of 2,400 Watts can run multiple electrical devices simultaneously.

#### Lightweight

At only 20 kg it can be easily carried by one person using the ergonomic non-slip handle.

#### Quiet

Ultra-silent running from only 51 dB(A) that won't disturb you or your neighbours.

#### **Long Running**

Up to 24 hours achieved by its fuel-efficient engine and long range 5 litre fuel tank.

#### **Easy To Use**

Yellow-coloured touch points guide you to the controls required for normal operation.

#### **Mains Quality Electricity**

Digital inverter technology safely powers all of your sensitive electronic equipment.

#### **Clean Air Technology**

4-stroke OHV petrol engine with Australian and US EPA compliant emission controls.

#### **Plug and Play**

Everything you need is in the box. No assembly required. Just add petrol.

#### **Safety Protection**


Electrical overload circuit breaker and low engine oil shutdown safequards.

#### **Warranty Protection**

2-year domestic use warranty to safeguard your investment (conditions apply).

# 2100/2400 RUNNING WATTS



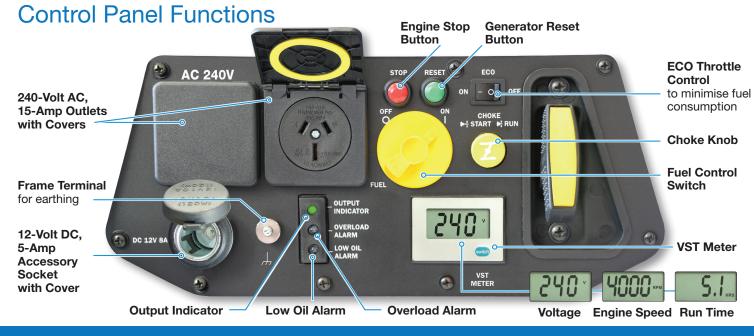

Specifications 2400i

| ENGINE                      |   |
|-----------------------------|---|
| Туре                        | 1-Cylinder, 4-Stroke,<br>Overhead Valve, Air Cooled |
| Displacement (cc)           | 79  |
| Maximum Speed (rpm)         | 5,000   |
| Oil Capacity (mL)           | 400   |
| Low Oil Shutdown            | Yes   |
| Spark Plug                  | Torch A5RTC   |
| Fuel                        | Unleaded Petrol                                     |
| Fuel Tank Capacity (L)      | 5.0   |
| Auto-Speed ECO Throttle     | Yes   |
| Fuel Gauge                  | Yes   |
| Auto-Speed ECO Throttle     | Yes   |
| Starting Method             | Recoil  |
| Hour Meter                  | Yes   |
| Run Time @ 400 / 1,600 W    | 16 / 5 hours  |
| Noise Level @ 400 / 1,600 W | 52 / 61 dB(A) @ 7m                                  |
| 12 VOLT DC ELECTRICAL       |   |
| Voltage (V)                 | 12  |
| Maximum Current (A)         | 8   |
| Maximum Power (W)           | 100   |
| Receptacle                  | 8 A, IP44   |

| 240 VOLT AC ELECTRICAL              |  |
|-------------------------------------|--|
| Voltage (V)                         | 240  |
| Frequency (Hz)                      | 50   |
| Number of Phases                    | 1  |
| Continuous Running Power (W) *      | 2,100                                      |
| Maximum Starting Power (W)          | 2,400                                      |
| Continuous Running Current (A)      | 8.8  |
| Voltage & Waveform Control          | Digital Inverter,<br>Pure Sine Wave Output |
| Total Harmonic Distortion (THD)     | < 2.5%                                     |
| Receptacles                         | 2 × 15 A, IP44                             |
| Overload Protection                 | Electronic                                 |
| Alternator                          | Brushless, Permanent Magnet                |
| Output Meter                        | Digital, Multi-Function                    |
| DIMENSIONS                          |  |
| Length (mm)                         | 500  |
| Width (mm)                          | 340  |
| Height (mm)                         | 440  |
| WEIGHT                              |  |
| Weight - Dry (kg)                   | 20   |
| Weight - Wet (kg)                   | 24   |
| * Rated output at 1.0 power factor. |  |

\* Rated output at 1.0 power factor.









westinghouseoutdoorpower.com.au